


Features

- 75 Ohm
- Plug in Design
- RoHS compliant
- Low Insertion Loss
- Excellent Cross over Isolation
- Small thickness


Introduction

"Sanland" Diplex Filter Unit products, having low insertion loss and low reflection characteristics. To reduce the complexity of the calibration work, can simplify the circuit design.

Functional Schematic

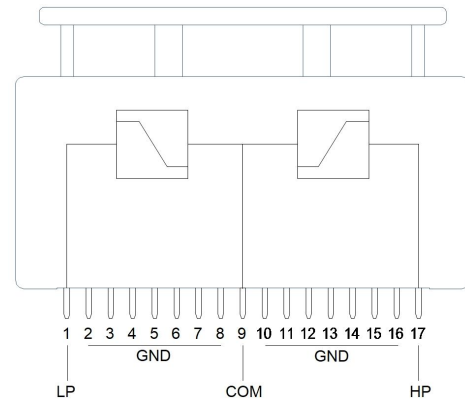

Dimension (Unit: mm, Tolerance: ± 0.2 mm)

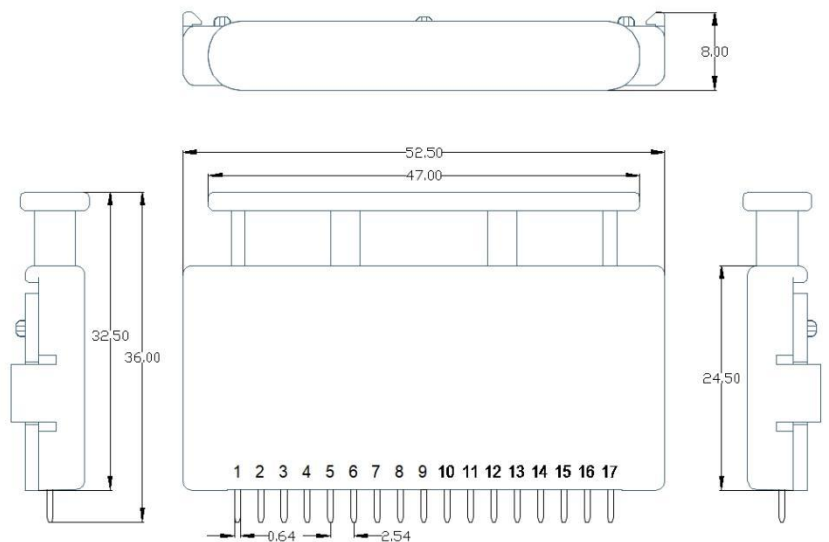

Pin Configuration

Pin number	Function
1	Low Pass Port
2~8	GND
9	Common
10~16	GND
17	High pass port

Electrical specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$

Parameter		Test conditions	Min.	Max.	Units
Frequency range		5 ~ 492MHz			
		606 ~ 1794MHz			
Insertion loss		5 ~ 492 MHz @492MHz	-	1.4	dB
		606 ~ 1794MHz @606MHz	-	1.4	dB
		606 ~ 1794MHz @1794MHz	-	1.5	dB
Crossover Isolation	HP-LP	397 ~ 491MHz	40	-	dB
Out of Band Rejection	High Pass	5-492MHz	47	-	dB
Out of Band Rejection	Low Pass	606-1000MHz	45	-	dB
		1001-1220MHz	45	-	dB
		1221-1794MHz	40	-	dB
Return loss		5 ~ 492MHz	-	-20	dB
		606 ~ 1000MHz	-	-20	dB
		1001 ~ 1794MHz	-	-19	dB